



PIN120

SINGLE DOOR ACCESS CONTROLLER /
STANDALONE KEYPAD

Part No. 101-040



The NESS IDTECK PIN120 is a versatile standalone keypad with 512 PIN codes, 2 relay outputs and many other features.



SPECIFICATIONS	101-040 PIN120
CPU	Dual 8bit Microprocessor
MEMORY	Program Memory: 8KByte ROM Data Memory: 2KByte EEPROM
PIN NUMBERS	512 PIN numbers
INPUTS/OUTPUT	Input : Exit Output: 2 x relay output (C, NO, NC). 1 x Chime bell output
KEYPAD	16 numeric keypad with back lighting
INDICATORS/BEEPER	3 LED (Red/Green/Yellow), Piezo buzzer
POWER	DC12V, Max. 160mA
ENVIRONMENTAL	-35°C ~ +65°C, 10% ~90% RH(Non-condensing)
WEIGHT	162g

- Programmable 6 digits Master ID.
- 512 users programmable PIN codes (4-6 digits in length).
- Programmable output times up to 99 seconds.
- 2 output relays capable of latching or times control.
- Bell output activated when 'Bell' key is depressed.
- 3 LED's for indicating run-mode and output activation.
- Melody sounds for operating sequence.
- Programmable numbers of try-out and programmable keypad lock time.
- Programmable silent operation.
- Unconditional output control.
- Quick access option activates output by "ENT" key only.
- Retains all memory data into flash memory.

STANDALONE CONFIGURATION

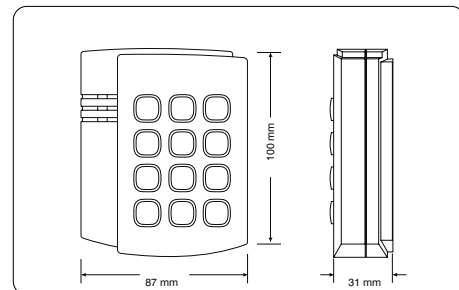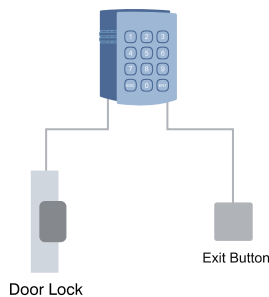

www.ness.com.au

© 2004 Ness Security Products Pty Ltd ABN 28 069 984 372
Photographs are used for illustrative purposes only. Design and specifications may vary.



Access Control Products



SYDNEY
02 8825 9222
sales@ness.com.au

MELBOURNE
03 9875 6400
nessmelb@ness.com.au

BRISBANE
07 3399 4910
nessbris@ness.com.au

PERTH
08 9328 2511
nessper@ness.com.au

ADELAIDE
08 8277 7255
aquavia@cobweb.com.au

NZ (NFS SECURITY)
+64 9 573 0401
sales@nfs.co.nz